


Specialize In Wire Conveyor Belt Manufacturing And Solution.

Balanced Woven Conveyor Belt with Chain Edge Enquiry Form

Please supply the following technical parameter information of your belt in order to obtain further quotation, if cannot confirm, please contact us by email in time.

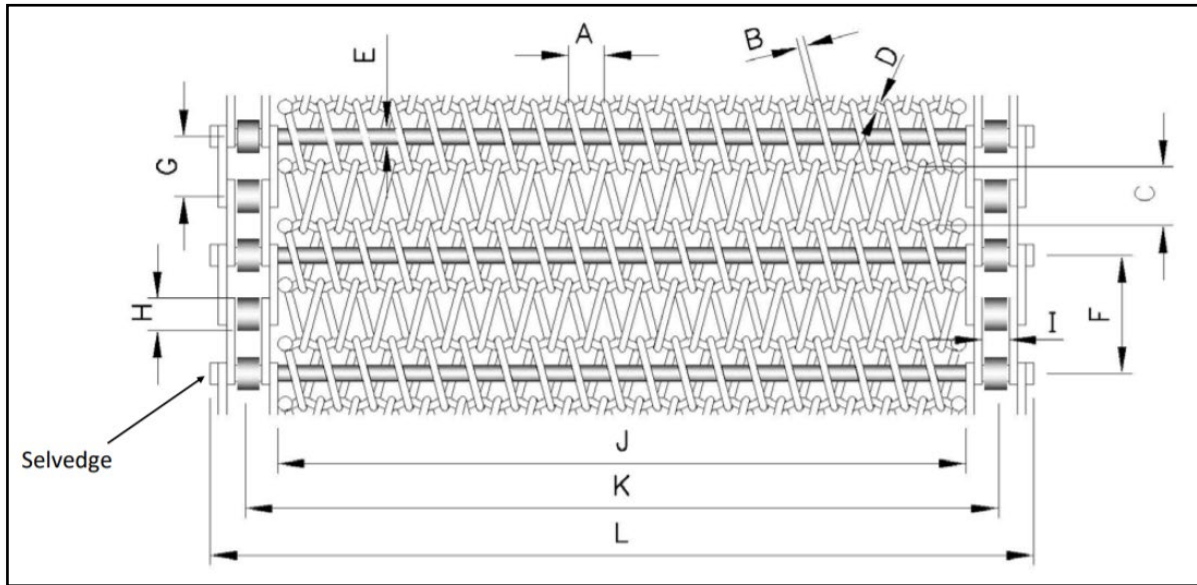

NOTE: When measuring pitches A & C, it is best practice to measure over 10 pitches and then divide by 10 to obtain the average pitch.

Basic information			
Mesh & Cross Rod Material	Chain Edge Material	Overall Width (mm)	Length (m)

Detailed information			
Mesh		Chain	
A: Coil Pitch (mm)		G: Chain Pitch: (mm)	
B: Coil Wire Diameter (mm)		H: Chain Roller Dia. (mm)	
C: Crimped Cross Wire Pitch (mm)		I: Inside Chain Width (mm)	
D: Crimped Cross Wire Dia. (mm)		J: Width Between Chains / Mesh Width (mm)	
E: Cross Rod Diameter (mm)		K: Chain Centers (mm)	
F: Cross Rod Pitch (mm)		L: Overall Width (mm)	
Large Coil at Cross Rod? (Yes/No)		Side Chain Style (Hollow Pin/Solid Pin)	

Please fill in your more demand information here: